

名称	性能指标
	1.5-16
	0-35Mpa
	-40-180
	90-100% GVF 0-0.3 LM
	2%
	2.5%
	ASME,API,Hub
	SS,DSS,CS,Inconel,Alloy
	24VDC 110/220VAC
	<50W
	RS232/485

1


2

3

西安思坦仪器股份有限公司
XI'AN SITAN INSTRUMENTS CO., LTD

-  22号
-  029-88814516
-  sales@sitan.com.cn
-  http://www.sitan.com.cn



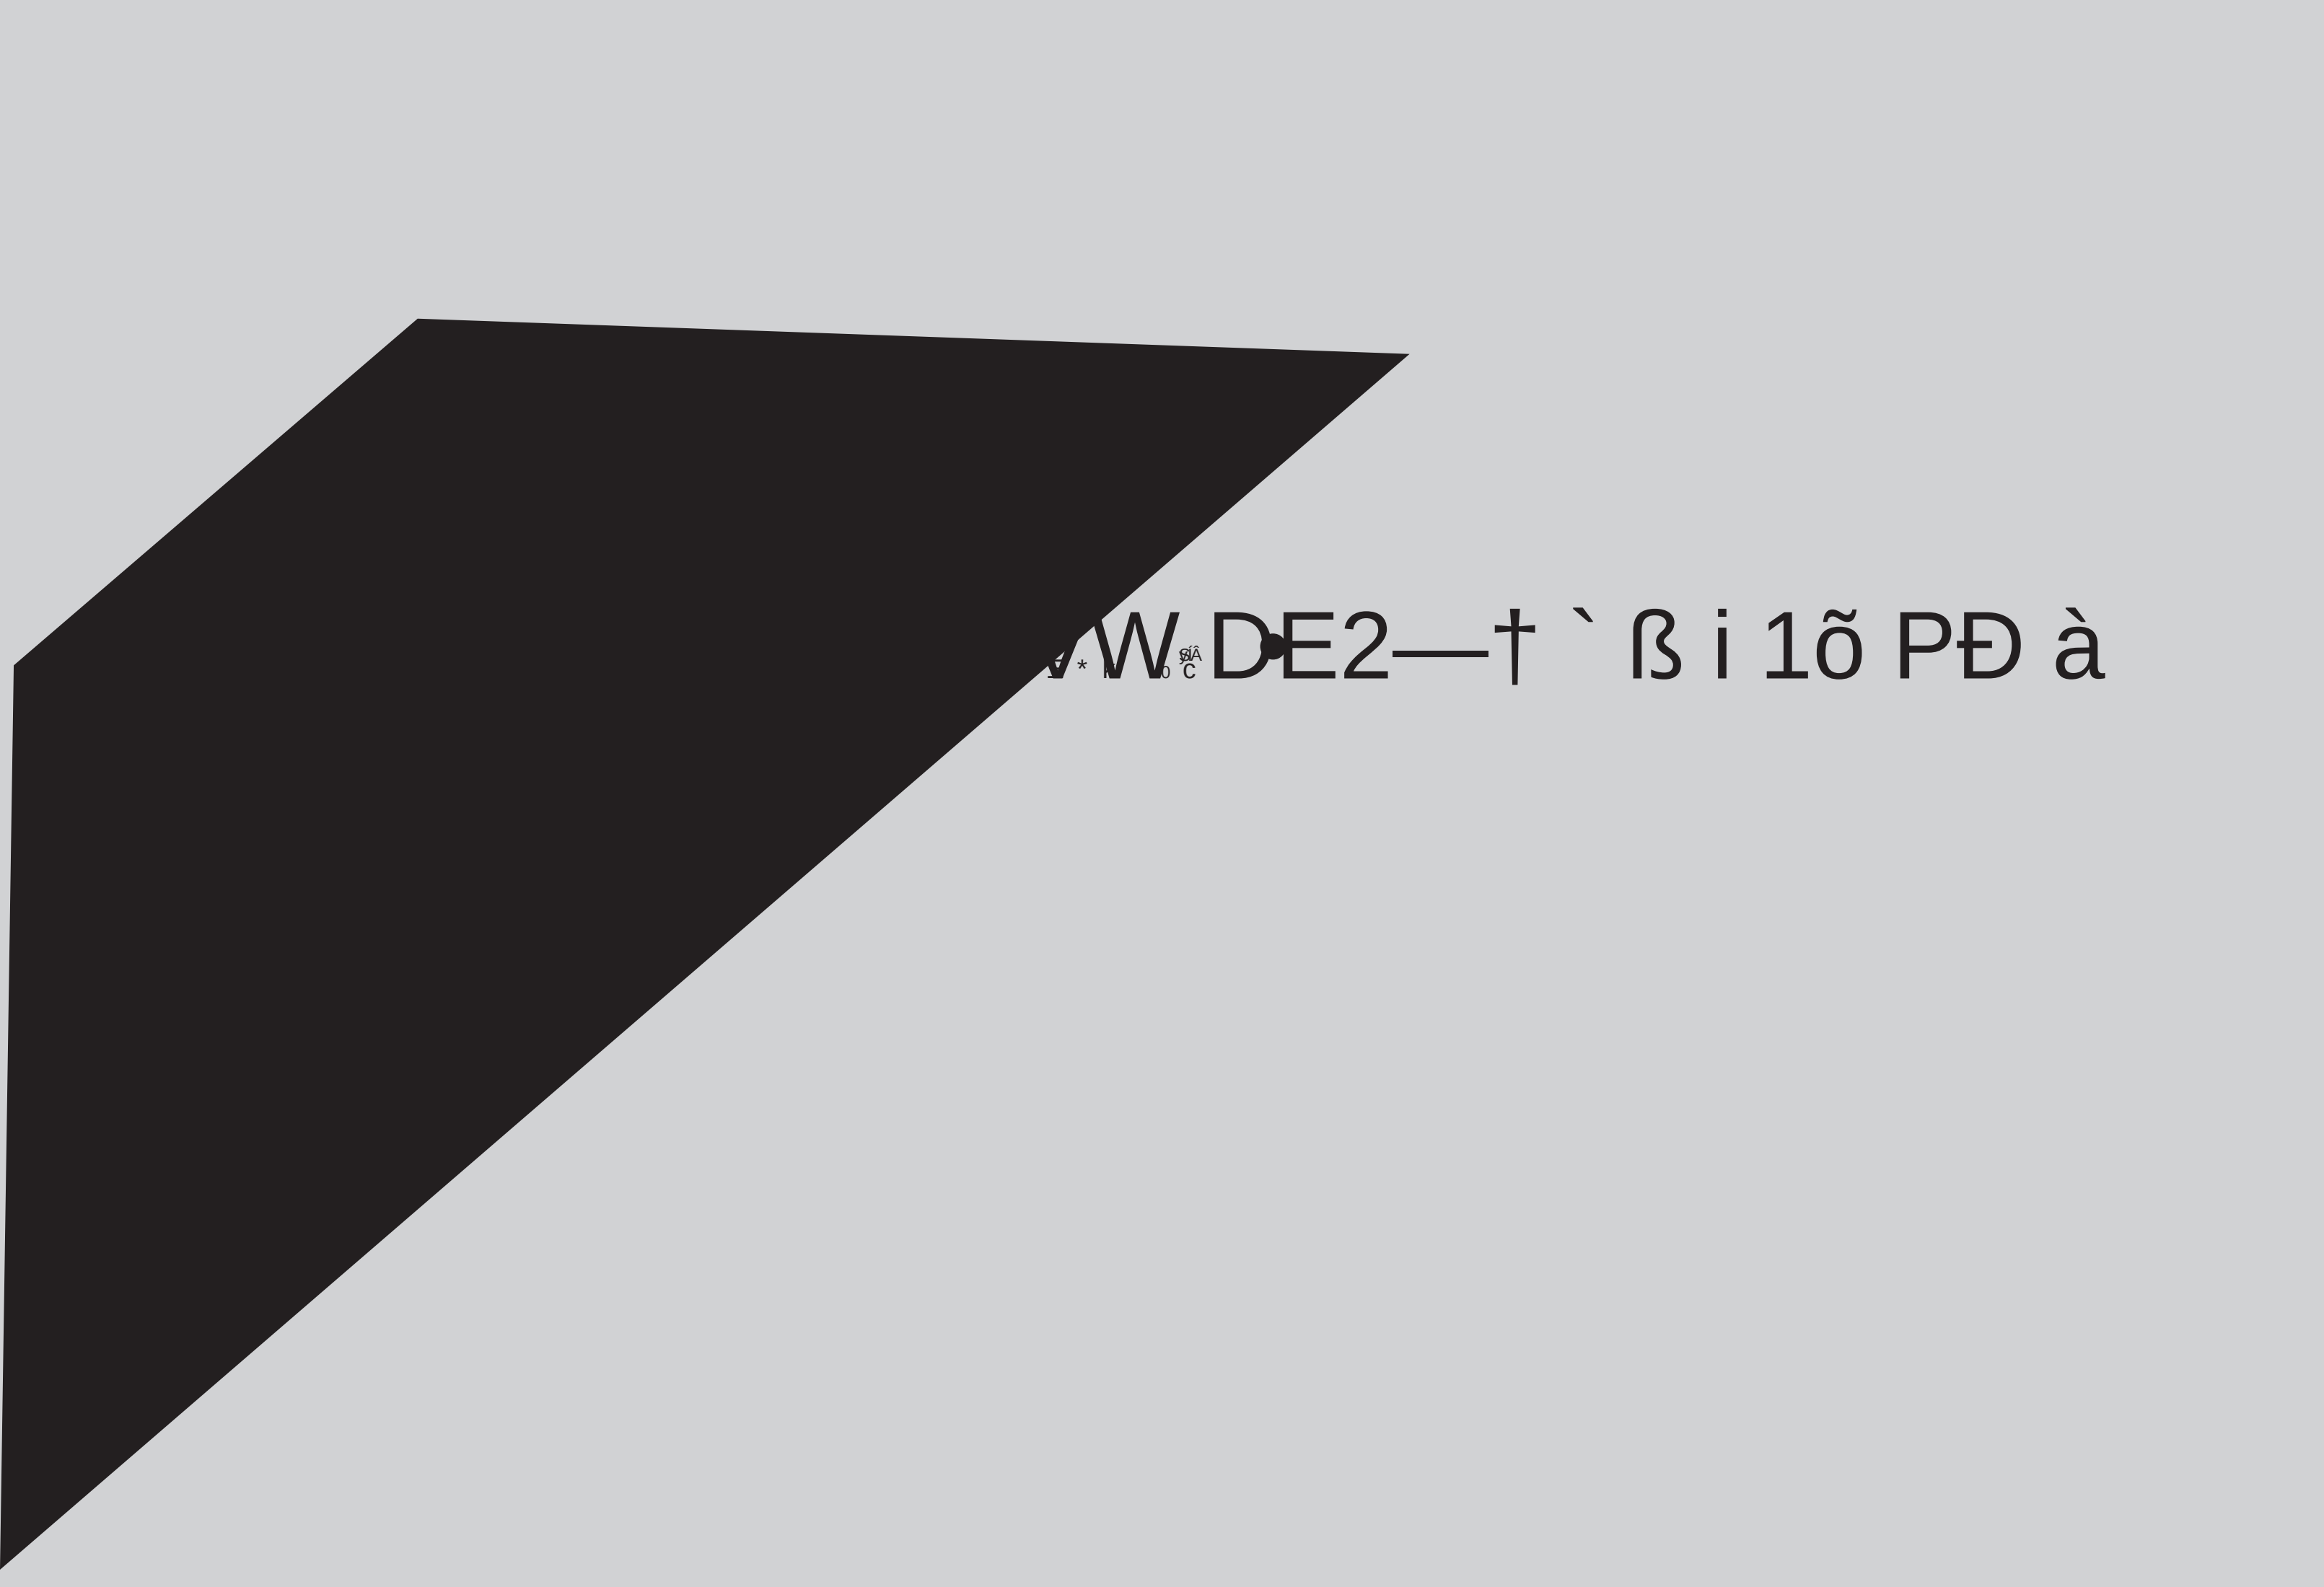

W DE2—† ` ß i 1õ PĐ à